


Exceeding Customer Expectations Since 1983

- Facilitates rapid construction.
- Rigid construction.
- Designed for large load, or for sites with stringent wind or ice loading.
- Face widths of 24", 36", 42" 48", 56", and 60" available.
- Triangular.
- Angle, pipe or solid round legs.
- Hot dip galvanized finish per ASTM A123.
- Includes integral climbing rungs and cabletype safety climb system on one face for 24", 36", 42", and 48".
- Face widths of 36", 42", 48", 56" and 60"

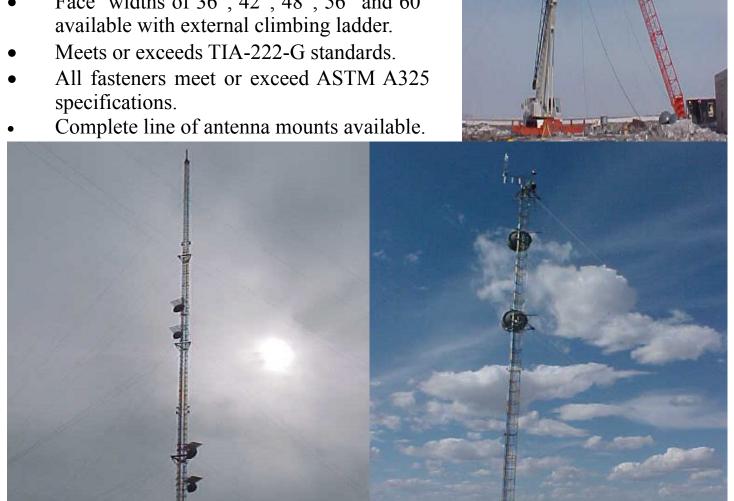

Ehresmann Engineering, Inc. and Associates

4400 W. 31st St. Yankton, SD 57078 Fax: (605) 665-9780 Phone: (605) 665-7532

Web Address: www.ehresmannengineering.com E-mail: info@ehresmannengineering.com